

Eaton 3105 UPS



Now featuring a
3-year warranty with
product registration!

Product Snapshot

Product rating:	500–700 VA
Voltage	120V and 230V
Frequency:	50 Hz and 60 Hz
Configuration:	Low-profile, plug-and-play unit
Topology:	Standby

Features

- Protect small office and home office equipment from power outages, surges and sags
- Save space with a compact design that fits easily under a desk or can be conveniently wall-mounted, with quick access to all receptacles
- Keep essential systems running through power outages by plugging them into receptacles with surge suppression and battery backup; plug nonessential equipment into receptacles featuring surge suppression only
- Extend UPS service life with user-replaceable batteries
- Protect networked equipment from “back door” power surges coming through LAN or telephone lines
- Stay informed of power problems and low battery conditions with audible alarms and remote alarm notification
- Deliver short-term mobile power with start-on-battery capability
- Rest easy with a three-year limited warranty with product registration and a \$25,000 load protection guarantee (US and Canada)
- Optional multi-year Gold Plan service is available to provide repair and replacement coverage that goes beyond the provisions of the limited warranty

In a perfect world, your incoming utility power would be smooth, steady and completely reliable. In the real world, however, utility power is plagued with sags, surges and outages—some of them even caused by your equipment itself.

The risks are everywhere. Lightning strikes, ice storms, over-demand on the utility grid, accidents and natural disasters can knock out power without warning. Everyday events, such as normal utility switching or rapid changes in power demand, can cause equipment-damaging surges or sags. A typical power customer experiences these events daily, as well as several complete outages a year.

Every time the lights dim when a major appliance starts up ... or a problem in the distribution grid causes a momentary loss of power ... or a surge travels down the line when the power comes back up again ... your sensitive electronic equipment is being hit with electrical forces it was never designed to withstand. Even when these power fluctuations don't crash systems or zap electronic components, they still cause insidious damage that can erode data integrity, damage important files and shorten hardware life.

You don't have to take it. Effective protection is here, at a very attractive price.



Powering Business Worldwide

Introducing the Eaton 3105 UPS

The Eaton® 3105 UPS provides a layer of defense between your equipment and erratic power. This cost-effective, compact device stands guard constantly, ready to take over and switch to battery power any time it detects a problem with normal utility power.

Affordable protection for small offices and home offices

Incorporating more than 40 years of UPS design experience, the 3105 provides cost-effective power management, backup power and power quality. This UPS is ideal for home wireless phones, small office PBX or key phone systems, home office workstations, small office desktop servers, small network nodes, point-of-sale systems and computer

peripheral devices. The 3105 is also perfect for small offices and home offices—anywhere reliable power is needed at an affordable price.

Eight outlets in a compact package

The compact unit is smaller than a shoebox and fits easily under a desk or can be conveniently wall-mounted. The cost-effective design features eight outlets, four with surge protection and battery backup and four with surge protection only. You can plug less critical equipment, such as printers or monitors, into surge-protection-only outlets that do not drain battery power.

Protection for data lines

Incoming power lines aren't the only source of damaging surges. Power also travels

across network links, such as LANs and telephone lines. The 3105 uses an integral network transient protector to safeguard network-connected equipment—such as fax machines, modems or electronic telephones—from “back door” power surges coming through network or phone wiring.

Short-term power for mobile applications

The 3105 supports start-on-battery capability, which means you can unplug the UPS from utility power, then restart and run it from battery power elsewhere. This capability offers tremendous flexibility for short-term powering needs, such as in mobile offices or service vans.

Surge-protected outlets (four) with spacing for transformer block plug-in



Surge and battery back-up outlets (four) with spacing for one transformer block plug-in

On/Off switch

On/Off, battery LED:
Utility line OK = steady
UPS on-battery = flashing

Warning LED:
UPS internal fault = steady
Low battery or overload = flashing

The 3105 delivers confidence—confidence that your vital office equipment is protected and confidence that Eaton will be there with you for the long term.

User-replaceable batteries for extended service life

Many UPS products in this power range are useful only up to the service life of their batteries. When the battery fails, the unit is worthless. Not so with the 3105. You can replace the batteries yourself—a simple process that requires no tools or expertise. When the audible alarm indicates that batteries need replacing, you can safely and easily install supplied batteries and remove the old batteries for proper disposal and recycling. You can also choose to return the entire unit for repair or battery replacement under our warranty program.

Easy-to-understand LEDs and audible alarms

You never have to guess about the status and condition of your 3105. Simple LED indicators and audible alarms warn of power problems and low battery conditions. The on/off/battery LED illuminates steadily when the UPS is operating on utility power and flashes when running on battery power. The warning LED turns on when the UPS has internal fault and flashes under overload or low battery conditions.


Remote UPS monitoring from anywhere

Our Intelligent Power® Manager software enables you to monitor and manage your UPSs and connected devices. This software is compatible with VMware's vCenter Server and can be downloaded free of charge from eaton.com/intelligentpower.

Warranty coverage with load protection guarantee

Rest easy with industry-leading protection from Eaton. The 3105 is backed by a three-year limited warranty (with product registration) and a \$25,000 load protection guarantee. We're that confident of the performance and reliability of the 3105.

To find out more about how the 3105 can protect your office equipment, applications and data, visit us at: www.eaton.com/powerquality 800.356.5794

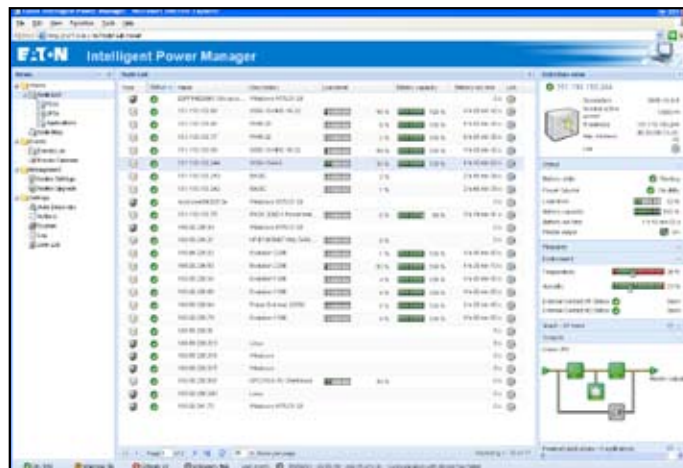

Intelligent Power Manager monitoring and management software

Technical specifications¹

VOLTAGE	120V		230V	
Model number	PW 3105 500	PW 3105 700	PW 3105 500i	PW 3105 700i
Part numbers	103004247-5592	103004248-5592	103004250-5592	103004251-5592
Capacity	500 VA/300W	700 VA/420W	500 VA/300W	700 VA/420W
Dimensions H x W x D, in (mm)	4.4 x 11 x 7 (110 x 180 x 280)	4.4 x 11 x 7 (110 x 180 x 280)	4.6 x 7 x 11 (117 x 180 x 280)	4.6 x 7 x 11 (117 x 180 x 280)
Weight, lb (kg)	11.2 (5.1)	14.3 (6.5)	12.1 (5.5)	15.4 (7.0)
Input connection	6-foot line cord with 90 deg. 5-15P		IEC C14 inlet, 1.8-meter line patch cord IEC to IEC	
Output connection	(8) 5-15R outlets (four battery backup & surge protection; four surge protection only)		(8) IEC C13 outlets (four battery backup & surge protection; four surge protection only)	

OPERATION

Input voltage range	0–160 Vac	0–300 Vac
Output voltage range	Nominal -20% to +15%	
On battery output voltage	115V ±10%	230V ±10%
Frequency	60 Hz	50 Hz
Lightning/surge protection	320 joules	476 joules
Safety	UL 1778 3rd Edition/CSAC22.2 No107.3, designed to meet UL497A	IEC 60240-1-1: CE low voltage directive
EMI	FCC Class B	IEC 62040-2, EN55022, Class B; CE EMC directive
Transfer time to battery/AC	2–6 msec. typical	
Battery type	Sealed, maintenance free lead-acid battery	
Backup time	3 minutes at full rated load	
Internet/phone/fax protection	RJ11/ RJ45	RJ11
Short circuit protection	Circuit Breaker	
Communication port	USB	

ENVIRONMENTAL

Operation temperature	0°C ~ 40°C (32°F ~ 104°F)
Operation relative humidity	0 to 95% non-condensing
Storage temperature	-15°C ~ 50°C (5°F ~ 122°F)

SOFTWARE

Intelligent Power Manager software is included free of charge. USB port and cables are included.

SERVICE PLANS

Product	Length of service	Gold Plan part number
3105 500–700 VA	Three years	3XXGX3100XALLCX
3105 500–700 VA	Five years	5XXGX3100XALLCX

REPLACEMENT BATTERIES

Model number	Part number	Description
PW 3105 500 VA	106711159-001	Battery kit 500 VA PW3105
PW 3105 700 VA	106711160-001	Battery kit 700 VA PW3105

BATTERY RUNTIMES (IN MINUTES)²

VA	50W	100W	150W	200W	250W	300W	350W	400W
500	43	17	11	6	4	3		
700	53	30	14	9	7	6	4	3

1. Due to continuing product improvement programs, all specifications are subject to change without notice.

2. This guide provides typical application information. Battery runtimes are approximate and may vary with equipment, configuration, battery age, temperature, etc.

UNITED STATES
8609 Six Forks Road
Raleigh, NC 27615 U.S.A.
Toll Free: 1.800.356.5794

www.eaton.com/powerquality

CANADA
Ontario: 416.798.0112
Toll free: 1.800.461.9166

LATIN AMERICA
South Cone: 54.11.4124.4000
Brazil: 55.11.3616.8500
Andean & Caribbean:
1.949.452.9610
Mexico & Central America:
52.55.9000.5252

EUROPE/MIDDLE EAST/AFRICA
Denmark: 45.3686.7910
Finland: 358.94.52.661
France: 33.1.6012.7400
Germany: 49.0.7841.604.0
Italy: 39.02.66.04.05.40
Norway: 47.23.03.65.50
Portugal: 55.11.3616.8500
Sweden: 46.8.598.940.00
United Kingdom: 44.1753.608.700

ASIA PACIFIC
Australia: 61.2.9693.9366
New Zealand: 64.0.3.343.3314
China: 86.21.6361.5599
HK/Korea/Taiwan: 852.2745.6682
India: 91.11.4223.2300
Singapore/SEA: 65.6825.1668

Eaton, Powerware and Intelligent Power are trade names, trademarks and/or service marks of Eaton Corporation or its subsidiaries and affiliates.



©2010 Eaton Corporation
All Rights Reserved
Printed in USA
3105FXA
June 2010